

Magnetic Transducer

MES8585040-16R(3.6V)-2730-F




DIMENSIONS

UNIT: mm


Tolerance: ± 0.5 mm

Housing material: LCP

RoHS Compliance

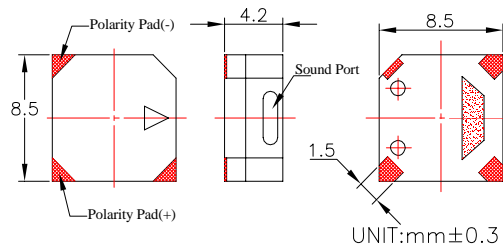

FREQUENCY RESPONSE

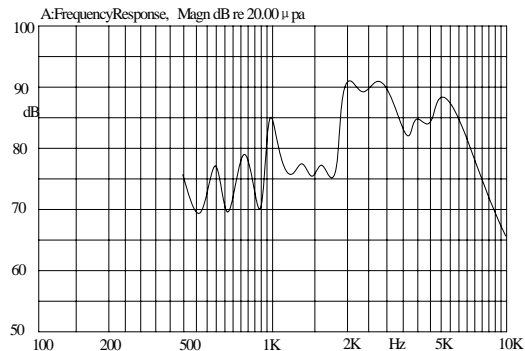

SPECIFICATIONS:

Rated Voltage	(Vp-p)	3.6
Operating Voltage	(Vp-p)	2.5~4.5
Rated Current	(mA)	MAX.90
Coil Resistance	(Ω)	16 \pm 3
Sound Output at 10cm	(dBA)	MIN. 87
Resonant Frequency	(Hz)	2730
Operating Temperature	($^{\circ}$ C)	-30~+80
Storage Temperature	($^{\circ}$ C)	-40~+85
Weight	(g)	0.6