


| SPECIFICATIONS | | |
|-----------------------|-------|----------|
| Rated Voltage | (VDC) | 3.0 |
| Operating Voltage | (VDC) | 2~5 |
| Rated Current | (mA) | MAX.30 |
| Sound Output at 10cm | (dBA) | MIN. 82 |
| Resonant Frequency | (Hz) | 2700±500 |
| Operating Temperature | (°C) | -25~+70 |
| Storage Temperature | (°C) | -30~+80 |
| Housing material | | MPPO |
| Weight | (g) | 1.0 |

| REVISION HISTORY | | | |
|------------------|-------------|------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| | | | |
| | | | |
| | | | |


CHARACTERISTICS

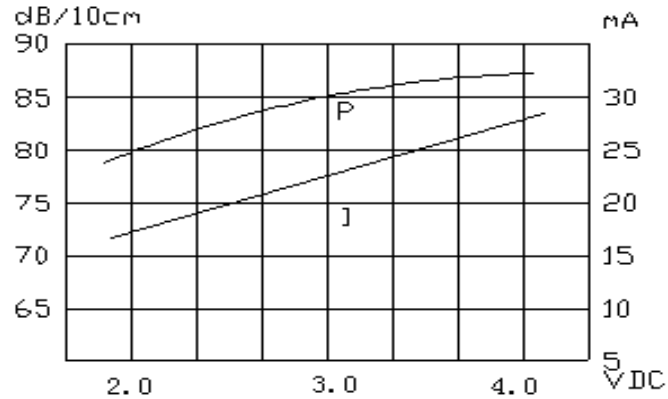

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

DIMENSION:

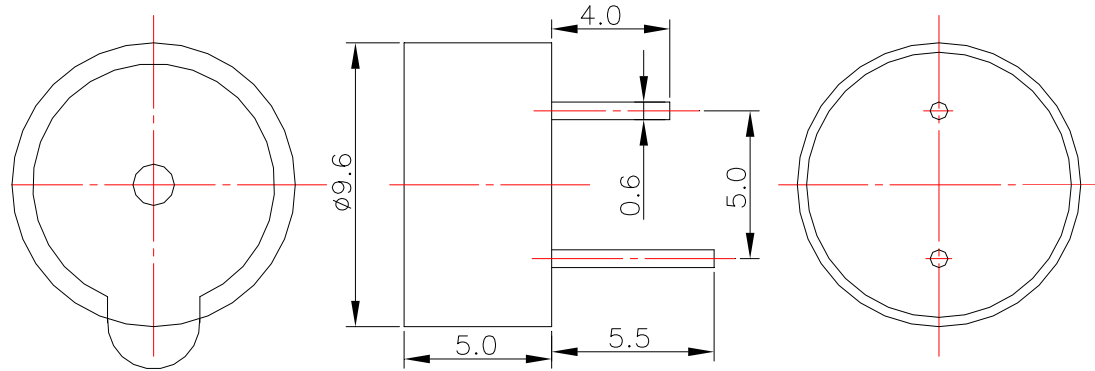

UNIT: mm±0.5

| | | | | | | | |
|--|------------------------------|---------------------|------|---|------|-------------|------|
| UNLESS OTHERWISE SPECIFIED | SIZE A4 | Designed by | Date | Checked by | Date | Approved by | Date |
| DIMENSIONS ARE IN MILLIMETERS | | Magnetic Transducer | | MCW9650-3V-2700-F | | | |
| TOLERANCES ARE ±0.5 AND ANGLES ARE ±3° | | | | Changzhou Shenghui Electronic Co.,Ltd Tel:+86 519 85118108 Fax:+86 519 85108596 sales@shenghui.com http://www.shenghui.com | | | |