


SPECIFICATIONS		
Rated Voltage	(Vo-p)	5.0
Operating Voltage	(Vo-p)	4~7
Rated Current	(mA)	MAX.100
Sound Output at 10cm	(dBA)	MIN.90
Coil Resistance	( $\Omega$ )	30 $\pm$ 5
Resonant Frequency	(Hz)	3000
Operating Temperature	( $^{\circ}$ C)	-30~+70
Storage Temperature	( $^{\circ}$ C)	-40~+80
Housing material		LCP
Weight	(g)	1.1

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED


### CHARACTERISTICS

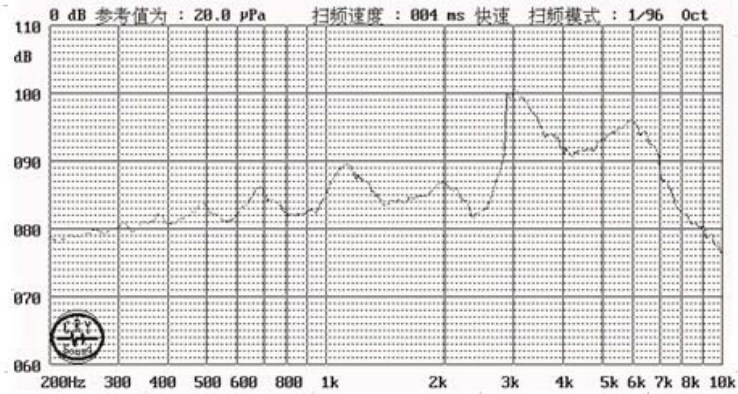

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

### DIMENSION:

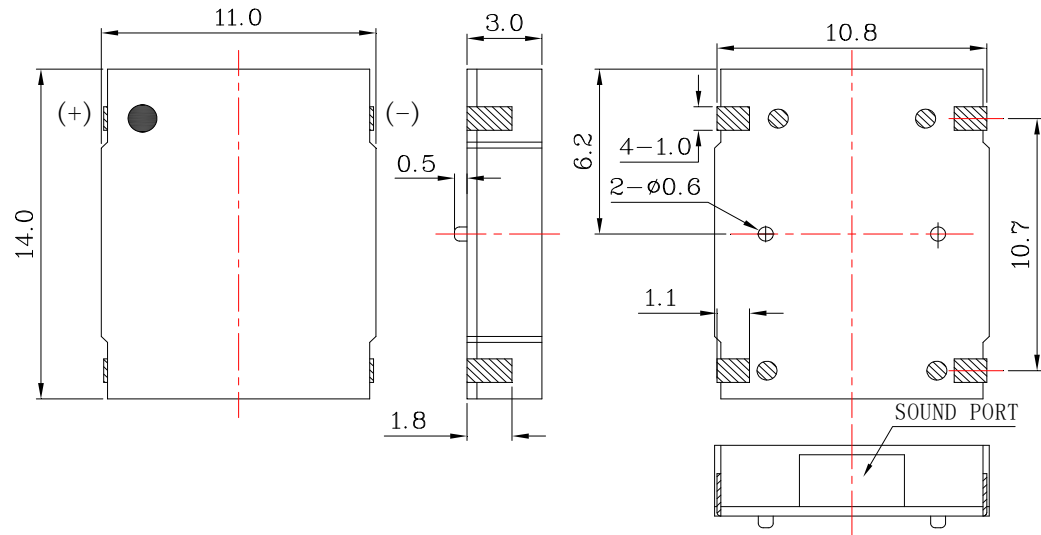

UNLESS OTHERWISE SPECIFIED	DESIGNED BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE	
DIMENSIONS ARE IN MILLIMETERS	SIZE <b>A4</b>	Magnetic Transducer		MES141130-30R(5V)-3000-F			
TOLERANCES ARE $\pm$ 0.5 AND ANGLES ARE $\pm$ 3 $^{\circ}$				Changzhou Shenghui Electronic Co.,Ltd Tel:+86 519 85118108 Fax:+86 519 85108596 sales@shenghui.com http://www.shenghui.com			