
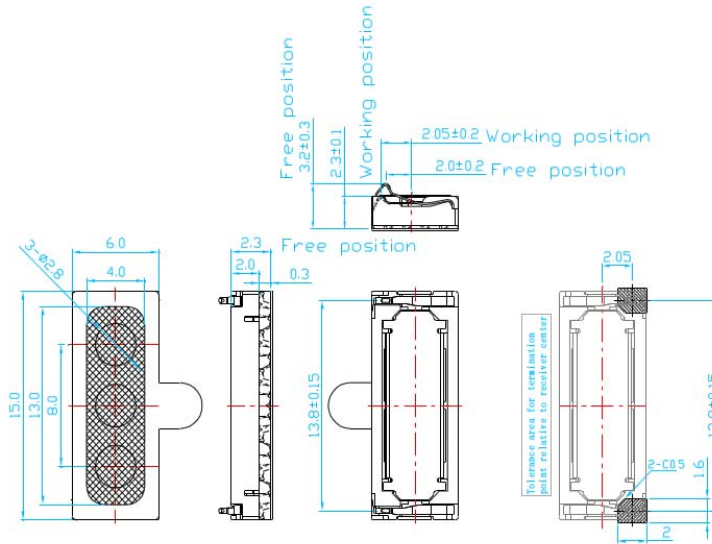


SPECIFICATIONS	
Dimension (mm)	6.0×15.0×2.0H
Input Power (mW)	10
Max Input Power (mW)	20
Impedance (Ω)	32 ± 15% at 1kHz
Sensitivity (S.P.L)	108 ± 3dB(at 179mV,1KHz) with IEC318 Coupler
Frequency Range (Hz)	300-7KHz
Operating Temperature (°C)	-20~+55
Storage Temperature (°C)	-20~+60
Weight (g)	0.5

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED

DIMENSION:

FREQUENCY RESPONSE:

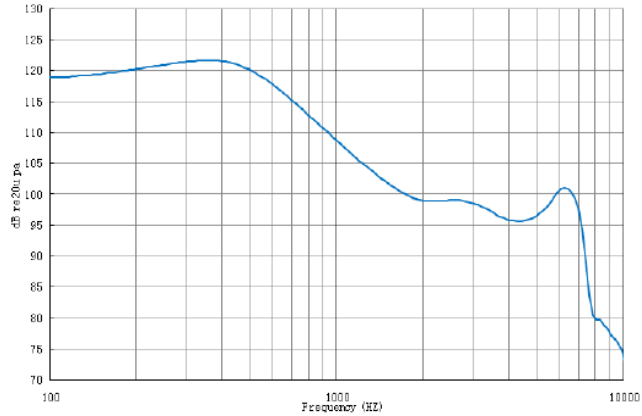

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED	SIZE A4	Designed by	Date	Checked by	Date	Approved by	Date
DIMENSIONS ARE IN MILLIMETERS		Cell Phone Speaker		SM0615R600P-F			
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°				Changzhou Shenghui Electronic Co.,Ltd Tel:+86 519 85118108 Fax:+86 519 85108596 sales@shenghui.com http://www.shenghui.com			