



SPECIFICATIONS		
Dimension (mm)		Φ66*60H
Input Power (W)		30.0W
Max. Input Power (W)		50.0W
Impedance (Ω)		4± 15% at 1kHz
Sensitivity (dB)		87± 3dB(0.1W/0.1m) average of 0.8,1.0,1.2,1.5 KHz
Frequency Rang (Hz)		Fo-7KHz
Operating temperature (°C)		-20~+55
Resonance Frequency (Hz)		180±20% at 1KHz 1V

REVISIONHISTORY			
LTR	DESCRIPTION	DATE	APPROVED

**CHARACTERISTICS:**

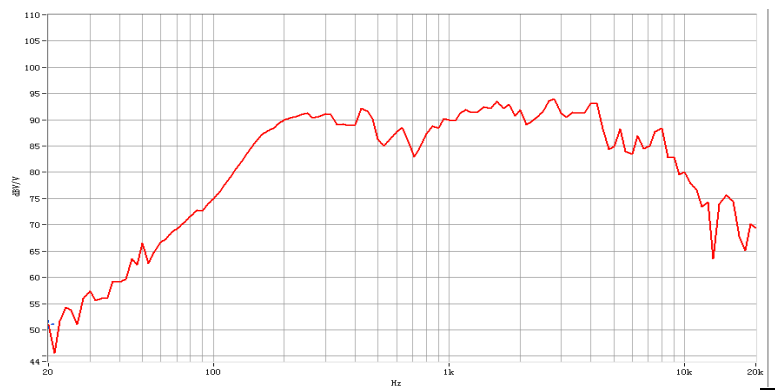

**DIMENSION:**

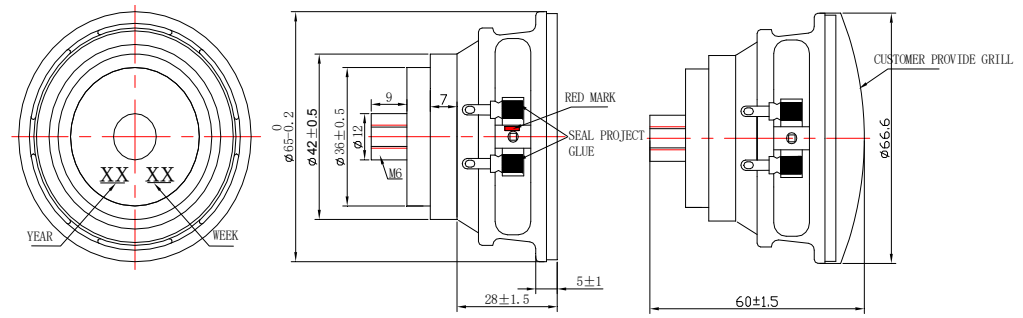

**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED	<b>SIZE</b>  <b>A4</b>	Designed by	Date	Checked by	Date	Approved by	Date
DIMENSIONS ARE IN MILLIMETERS		<b>Loud Speaker</b>		<b>SN66S101-4R</b>			
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°				<b>Changzhou Shenghui Electronic Co.,Ltd</b> Tel:+86 519 85118108 Fax:+86 519 85108596 sales@shenghui.com http://www.shenghui.com			