



SPECIFICATIONS	
Dimension (mm)	9.0×16.0×3.0H
Input Power (W)	0.5 (1cc cavity)
Max Input Power (W)	1.0 (1cc cavity)
Impedance (Ω)	8 \pm 15% at 2kHz
Sensitivity (dB)	80 \pm 3dB(0.1W,0.1M) average of 0.8,1.0,1.2,1.5 KHz
Resonance Frequency(Hz)	850 \pm 20%@1.0V (1cc cavity)
Frequency Range (Hz)	F0-20KHz
Operating Temperature ($^{\circ}$ C)	-20~+55
Weight (g)	1.5

REVISIONHISTORY			
LTR	DESCRIPTION	DATE	APPROVED

DIMENSION:

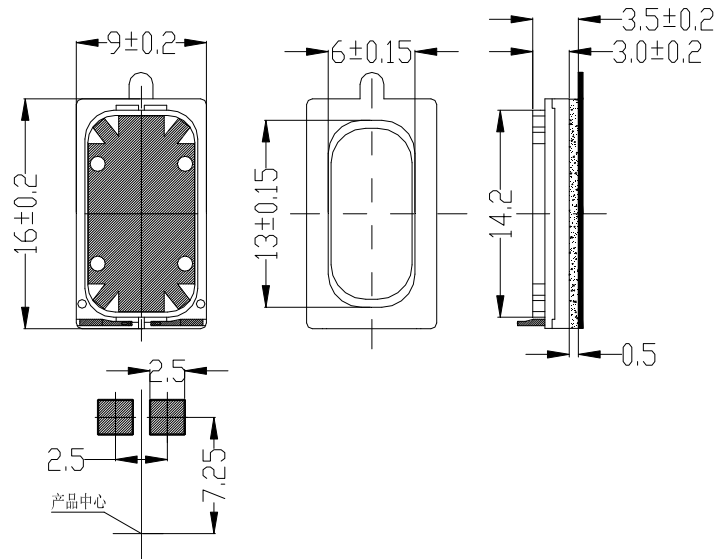

FREQENCYRESPONSE:

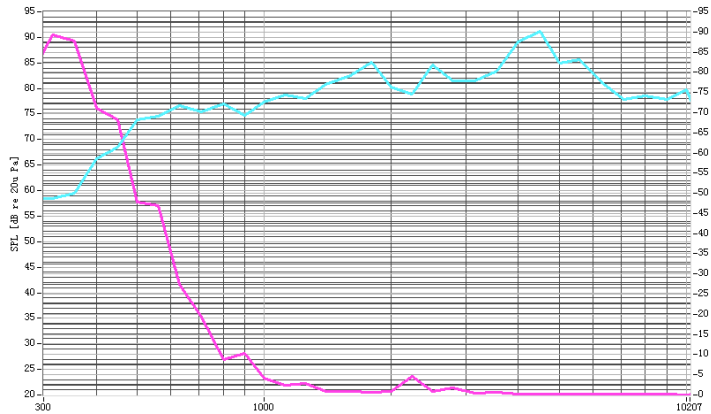

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS ROHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED	SIZE A4	Designed by	Date	Checked by	Date	Approved by	Date
DIMENSIONS ARE IN MILLIMETERS		Cell Phone Speaker		SM1609S100P-F			
TOLERANCES ARE \pm 0.5 AND ANGLES ARE \pm 3 $^{\circ}$				Changzhou Shenghui Electronic Co.,Ltd Tel:+86 519 85118108 Fax:+86 519 85108596 sales@shenghui.com http://www.shenghui.com			